





WITH CABLE

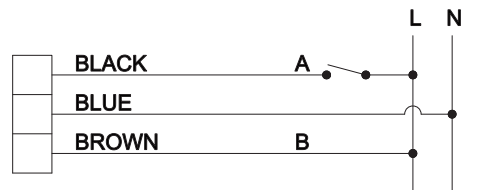


WITH MOLEX CONNECTOR

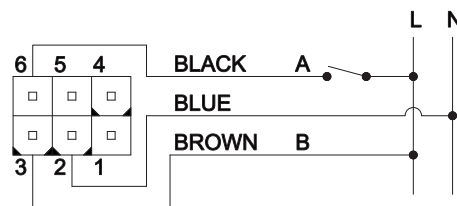


LK Armatur

www.lkarmatur.se

LK 525

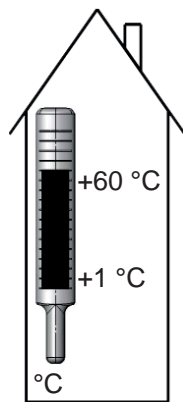

Amb. temp.



Diff. press. 0,1 MPa / 1 bar
Max press. 1,0 MPa / 10 bar



RoHS 2002/96/CE
WEEE 2003/11/CE



3-vägs Växelventil
 3-vejs Zoneventil
 3-way Zone valve
 3-wege Zonenventil
 3-voies Vanne de zone

Art. nr: 048270-1 · 1804

LK Armatur AB

Garnisonsgatan 49 • SE-254 66 Helsingborg • Sweden

Phone: +46 (0)42-16 92 00 • Fax: +46 (0)42-16 92 20

info@lkarmatur.se • www.lkarmatur.se

Monterings- och bruksanvisning | Installations- og betje-
 ningsvejledning | Mounting and Operating Instructions |
 Montage- und Bedienungsanleitung | Notice de montage

Technical information

Material - ventilhus | valve | Ventilgehäuse | Corps de robinet

Ställmotor | Aktuator | Actuator | Stellmotor | Moteur de réglage

Gångtid | Gangtid | Operation time | Laufzeit | Durée de marche

Anslutning med kabel | Tilslutning med kabel |

Connection by cable | Anschluss mit Kabel |

Raccord par câble

Signalkontakt | Signal kontakt | Signal connector |

Contact de signalisation

Mässing | Messing | Brass | Messing | Laiton

EN 12165 CW617N, (MS58)

7 VA, 230/24 VAC, 50 Hz, IP 40

Ca 8 sek

3-ledare | 3-leder | stik | wire | Leiter | conducteurs/Molex®- kontakt | connector | kontakt | contact

1-polig SPST | 1-polet SPST | 1-pole SPST |

Signalkontakt ein-polig SPST | Une bobine SPST

